

HD-Mini

HD Digital Satellite Receiver



1 year
service warranty

7 days
EPG



MPEG4
HD/SD

- Support MPEG-4 HD and SD Channels
- IRDETO CAS embedded with 1 Smart card slot
- Access to all Free-to-air Channels
- PVR ready Function via USB port
- Media(MP3,JPEG) Play via USB port
- Multi-Satellite receiver
- HUMAX AUTO Antenna search
- HUMAX OTA
- 7 days HUMAX advanced EPG
- TV/Radio Channel List
- 1 year service warranty
- Language : English, Arabic, Persian and French

- يدعم القنوات عالية الوضوح HD و قنوات الدقة العادية MPEG-4 SD
- يتضمن مدخل لبطاقة نظام اريدتو ذات نظام الولوج المشروط (IRDETO CAS)
- امكانية مشاهدة القنوات المجانية و غير المشفرة
- تسجيل فيديو شخصي بوظائف جاهزة عبر منفذ USB
- مشغل مقاطع MP3 وصور JPEG عبر منفذ USB
- تقنية استقبال لاكثر من قمر
- نظام بحث هيوماكس التلقائي
- بحث هيوماكس الآلي للبحث السهل للترتيب الهوائي
- دليل برامج الكتروني 7 ايام
- لائحة القنوات ل الراديو/التلفزيون
- خدمة الضمان لسنة واحدة
- يدعم اللغات: العربية، الانكليزية، الفارسية و الفرنسية

HD-Mini

HD Digital Satellite Receiver

Specifications

Software specification

Basic System	MPEG-2/4 Digital and Fully DVB-S/S2 compliant
Video System	H.264(HD)compliant
CAS	IRDETO Secure Silicon(UCCA)/ 1 Smart Card Slot
Channel memory	5000
EPG	HUMAX EPG
OSD	English, Arabic, Persian, French
OTA	Irreto OTA and HUMAX OTA

I/O Specification

Tuner	1 x LNB Input
RCA Out	1 x CVBS/L/R
HDMI out	1 x HDMI
USB	1 x USB 2.0
Smart Card Slot	1

Tuner & Channel

No. of Tuners	1
Input Connector	F-Type, IEC 169-24, Female, 1 x Input
Frequency Range	950MHz to 2150MHz
Signal Level	-25dBmV to -69dBmV
LNB Power & Polarisation	Vertical: +13.3V Horizontal: +18.3V Current: Max. 350mA (Overload protection)
22KHz Tone	22kHz \pm 4kHz Tone
DiSeqc Control	1.0, 1.2, USALS compatible
Demodulation	DVB-S/S2 (QPSK & 8PSK)
Bandwidth	Up to 36Mhz
Input, Symbol Rate	DVB-S: 2~45MBaud DVB-S2: 3~42MBaud (QPSK), 3~30MBaud (8PSK)
FEC Mode	DVB-S: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 DVB-S2: Auto, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10(QPSK) Auto, 3/5, 2/3, 3/4, 5/6, 8/9, 9/10(8PSK)

Power Supply

Input Voltage	100-240V AC, 50/60Hz
Power Cord	Adaptor type (3 Pin Plug)
Power Switch	None

Physical specification


Size (W x H x D)	160 x 34 x 133 mm
------------------	-------------------

Video/Audio Processing

Video Decoder	MPEG2 (HP@HL), H.264 (HP@L4.2)
Audio Decoder	MPEG1 Layer-I/II/III
Picture Decoder	MPEG2 I-Frame, JPEG, JPEG2000, BMP, GIF, PNG
Output Resolution	1080p (output only)/ 1080i/ 720p/ 576p/ 576i
Graphics	32bpp with 256 alpha blending
Audio Mode	Single/ Dual Mono/ Stereo/ Joint Stereo

Front Panel

USB 2.0	1 Slot
Smart Card	1 Slot

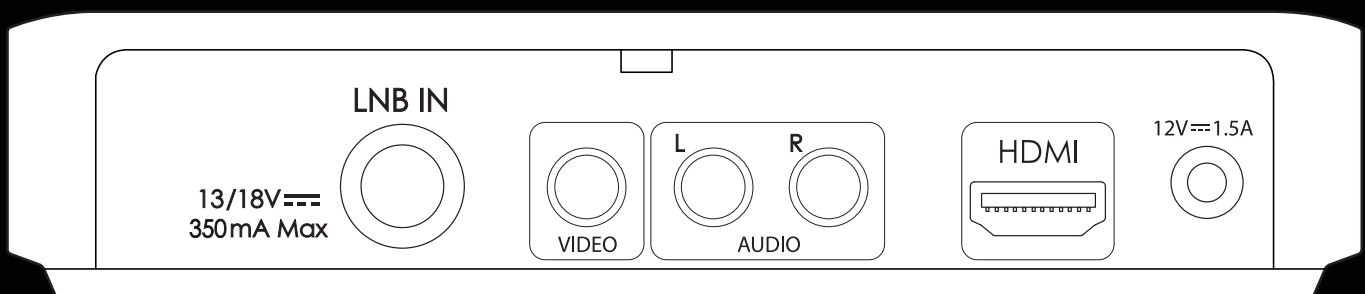

HUMAX Gulf FZE

P.O. Box 17459 Dubai, U.A.E.
Tel: +971 4 359 2323 Fax: 9714 351 9393
E-mail: callcenterme@humaxdigital.com
www.humaxdigital.com/me

HUMAX